

# TECHNICAL DATA

## Fluke 1736 and 1738 Three-Phase Power Loggers



### KEY MEASUREMENTS

Automatically capture and log voltage, current, power, harmonics and associated power quality values

### FLUKE CONNECT® COMPATIBLE\*

View data locally on the instrument, via Fluke Connect mobile app and desktop software or through your facilities' WiFi infrastructure.

### CONVENIENT INSTRUMENT POWERING

Power instrument directly from the measured circuit

### HIGHEST SAFETY RATING IN THE INDUSTRY

600 V CAT IV/1000 V CAT III rated for use at the service entrance and downstream

### More visibility, reduced uncertainty and better power quality and energy consumption decisions

The Fluke 1736 and 1738 Three-Phase Power Loggers built with Fluke Connect® mobile app and desktop software compatibility give you the data you need to make critical power quality and energy decisions in real-time. The ideal test tools for conducting energy studies and basic power quality logging, the 1736 and 1738 automatically capture and log over 500 power quality parameters so you have more visibility into the data you need to optimize system reliability and savings.

An optimized user interface, flexible current probes, and an intelligent measurement verification function that allows you to reduce measurement errors by digitally verifying and correcting common connection errors makes setup easier than ever and reduces measurement uncertainty. Access and share data remotely with your team via the Fluke Connect® app so you can maintain safer working distances and make critical decisions in real-time, reducing the need for protective equipment, site visits and check-ins. You can also quickly and easily chart and graph measurements to help identify issues and create detailed reports with the included Fluke Energy Analyze Plus software package.

- **Measure all three phases and neutral** with included 4 flexible current probes.
- **Comprehensive logging:** More than 20 separate logging sessions can be stored on the instruments. In fact, all measured values are automatically logged so you never lose measurement trends. They can even be reviewed during logging sessions and before downloading for real-time analysis.
- **Capture dips, swells, and inrush currents:** includes event waveform snapshot and high resolution RMS profile, along with date, timestamp and severity to help pinpoint potential root causes of power quality issues.
- **Bright, color touch screen:** Perform convenient in-the-field analysis and data checks with full graphical display.
- **Optimized user interface:** Capture the right data every time with quick, guided, graphical setup and reduce uncertainty about your connections with the intelligent verification function.
- **Complete "in-the-field" setup through the front panel or Fluke Connect App:** no need to return to the workshop for download and setup or to take a computer to the electrical panel.

\*Not all models are available in all countries. Check with your local Fluke representative.

- **Fully integrated logging:** Connect other Fluke Connect devices to the Fluke 1738 to simultaneously log up to two other measurement parameters, virtually any parameter available on a Fluke Connect wireless digital multimeter or module.\*
- **Energy Analyze Plus application software:** Download and analyze every detail of energy consumption and power quality state of health with our automated reporting.

\*Not all models are available in all countries. Check with your local Fluke representative.

## Applications

**Load studies:** verify electrical system capacity before adding loads


**Energy assessments:** quantify energy consumption before, and after improvements, to justify energy saving devices

**Harmonics measurements:** uncover harmonic issues that can damage or disrupt critical equipment

**Voltage and current event capture:** monitor for dips, swells and inrush currents that cause false resets or nuisance circuit breaker tripping


## Log the most common parameters

Designed to measure the most critical three-phase power parameters, the 1736 and 1738 can simultaneously log rms voltage, rms current, voltage and current events, voltage and current THD, voltage and current harmonics up to the 50th harmonic, active power, reactive power, power factor, active energy, reactive energy, and more. With enough memory for more than a year of data logging, the 1736 and 1738 can uncover intermittent or hard-to-find issues that might otherwise have been missed.

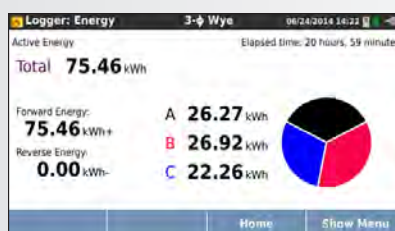


Conduct multiple studies with one instrument; download while studies are in progress via USB stick or Fluke Connect mobile app.

Suitable for NEC 220 load studies

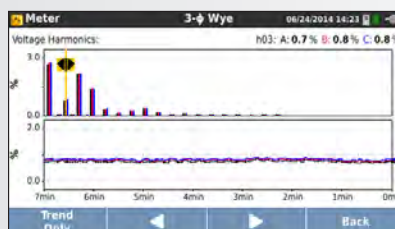

Discover the source of voltage and current distortion that may be affecting your equipment

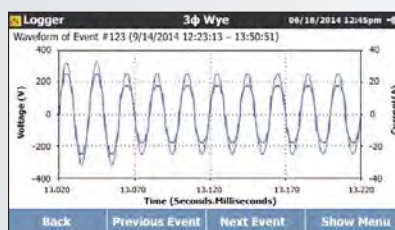

Capture voltage events and inrush currents with pre-defined thresholds




Simple setup means all available measured parameters are automatically selected during logging so you can be sure you have the data you need, even before you know you need it

## Easy to use

The four current probes are connected separately; the instrument automatically detects and scales the probes. The thin current probes are designed to easily get through tight conductor spacing and are easily set to 150 or 1500 A for high accuracy in nearly any application. An innovative tangle-free flat voltage lead makes connection simple and reliable and the instrument's intelligent 'Verify Connection' feature automatically checks to make sure the instrument is connected correctly and can digitally correct common connection issues without having to disconnect measurement leads.

The detachable power supply can be conveniently and safely powered directly from the measured circuit—no more searching for power outlets or having to run multiple extension cords to the logging location.

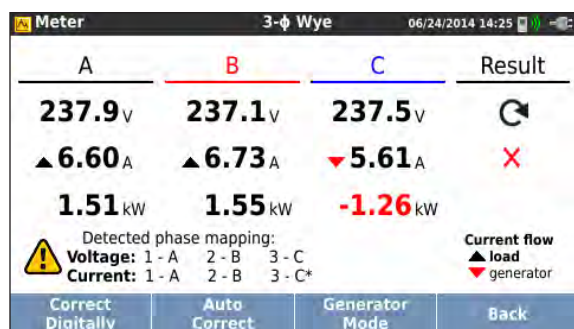

Intelligent verification function that digitally corrects most common measurement connections


## Data downloading couldn't be easier or more flexible:

- Download directly to a USB flash drive that plugs directly into the USB port of the instrument
- View measurements remotely via the Fluke Connect mobile app and desktop software, helping you maintain safer working distances and reducing the need for personal protective equipment and unnecessary site visits and check-ins\*

\*Not all models are available in all countries. Check with your local Fluke representative.

## Analysis and Reporting

Capturing logged data is just one part of the task. Once you have the data, you need to create useful information and reports that can be easily shared and understood by your organization or customers. Fluke Energy Analyze Plus software makes that task as simple as possible. With powerful analysis tools and the ability to create customized reports in minutes you'll be able to communicate your findings and quickly solve problems so you can optimize system reliability and savings.

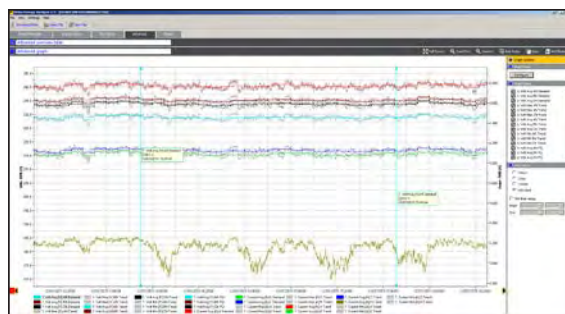

Quickly and easily compare any measured parameter



## Specifications

| Accuracy                       |                     |                      |                      |                                                                                                          |
|--------------------------------|---------------------|----------------------|----------------------|----------------------------------------------------------------------------------------------------------|
| Parameter                      |                     | Range                | Max. resolution      | Intrinsic accuracy at reference conditions<br>(% of reading + % of full scale)                           |
| Voltage                        |                     | 1000 V               | 0.1 V                | $\pm (0.2 \% + 0.01 \%)$                                                                                 |
| Current                        | i17xx-flex 1500 12" | 150 A<br>1500 A      | 0.1 A<br>1 A         | $\pm (1 \% + 0.02 \%)$<br>$\pm (1 \% + 0.02 \%)$                                                         |
|                                | i17xx-flex 3000 24" | 300 A<br>3000 A      | 1 A<br>10 A          | $\pm (1 \% + 0.03 \%)$<br>$\pm (1 \% + 0.03 \%)$                                                         |
|                                | i17xx-flex 6000 36" | 600 A<br>6000 A      | 1 A<br>10 A          | $\pm (1.5 \% + 0.03 \%)$<br>$\pm (1.5 \% + 0.03 \%)$                                                     |
|                                | i40s-EL clamp       | 4 A<br>40 A          | 1 mA<br>10 mA        | $\pm (0.7 \% + 0.02 \%)$<br>$\pm (0.7 \% + 0.02 \%)$                                                     |
| Frequency                      |                     | 42.5 Hz to 69 Hz     | 0.01 Hz              | $\pm (0.1 \%)$                                                                                           |
| Aux input                      |                     | $\pm 10$ V dc        | 0.1 mV               | $\pm (0.2 \% + 0.02 \%)$                                                                                 |
| Voltage min/max                |                     | 1000 V               | 0.1 V                | $\pm (1 \% + 0.1 \%)$                                                                                    |
| Current min/max                |                     | defined by accessory | defined by accessory | $\pm (5 \% + 0.2 \%)$                                                                                    |
| THD on voltage                 |                     | 1000 %               | 0.1 %                | $\pm 0.5$                                                                                                |
| THD on current                 |                     | 1000 %               | 0.1 %                | $\pm 0.5$                                                                                                |
| Voltage harmonics 2nd ... 50th |                     | 1000 V               | 0.1 V                | $\geq 10$ V: $\pm 5 \%$ of reading<br>$< 10$ V: $\pm 0.5$ V                                              |
| Current harmonics 2nd ... 50th |                     | defined by accessory | defined by accessory | $\geq 3 \%$ of current range: $\pm 5 \%$ of reading<br>$< 3 \%$ of current range: $\pm 0.15 \%$ of range |
| Unbalance                      |                     | 100 %                | 0.1 %                | $\pm 0.2$                                                                                                |

| Intrinsic uncertainty $\pm$ (% of reading + % of range) <sup>1</sup> |                          |                                  |                            |                           |                   |
|----------------------------------------------------------------------|--------------------------|----------------------------------|----------------------------|---------------------------|-------------------|
| Parameter                                                            | Influence quantity       | iFlex1500-12<br>150A/1500A       | iFlex3000-24<br>300A/3000A | iFlex6000-36<br>600/6000A | i40s-EL<br>4A/40A |
| Active Power P<br>Active Energy E <sub>a</sub>                       | PF $\geq 0.99$           | 1.2 % + 0.005 %                  | 1.2 % + 0.0075 %           | 1.7 % + 0.0075 %          | 1.2 % + 0.005 %   |
| Apparent Power S<br>Apparent Energy E <sub>ap</sub>                  | 0 $\leq$ PF $\leq 1$     | 1.2 % + 0.005 %                  | 1.2 % + 0.0075 %           | 1.7 % + 0.0075 %          | 1.2 % + 0.005 %   |
| Reactive Power Q<br>Reactive Energy E <sub>r</sub>                   | 0 $\leq$ PF $\leq 1$     | 2.5 % of measured apparent power |                            |                           |                   |
| Power Factor PF<br>Displacement Power Factor DPF/cos $\phi$          | —                        | $\pm 0.025$                      |                            |                           |                   |
| Additional uncertainty in % of range <sup>1</sup>                    | V <sub>P-N</sub> > 250 V | 0.015 %                          | 0.0225 %                   | 0.0225 %                  | 0.015 %           |

<sup>1</sup>Range = 1000 V x Irange

### Reference conditions:

- **Environmental:** 23 °C  $\pm$  5 °C, instrument operating for at least 30 minutes, no external electrical/magnetic field, RH < 65 %
- **Input conditions:** Cos $\phi$ /PF=1, Sinusoidal signal f=50 Hz/60 Hz, power supply 120 V/230 V  $\pm$  10 %.
- **Current and power specifications:** Input voltage 1 ph: 120 V/230 V or 3 ph wye/delta: 230 V/400 V Input current: I > 10 % of Irange
- **Primary conductor of clamps or Rogowski coil in center position**
- **Temperature coefficient:** Add 0.1 x specified accuracy for each degree C above 28 °C or below 18 °C

| Electrical specifications           |                                                                                                                                                                 |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply                        |                                                                                                                                                                 |
| Voltage range                       | 100 V to 500 V using safety plug input when powering from the measurement circuit<br>100 V to 240 V using standard power cord (IEC 60320 C7)                    |
| Power consumption                   | Maximum 50 VA (max. 15 VA when powered using IEC 60320 input)                                                                                                   |
| Efficiency                          | ≥ 68.2 % (in accordance with energy efficiency regulations)                                                                                                     |
| Maximum no-load consumption         | < 0.3 W only when powered using IEC 60320 input                                                                                                                 |
| Mains power frequency               | 50/60 Hz ± 15 %                                                                                                                                                 |
| Battery                             | Li-ion 3.7 V, 9.25 Wh, customer-replaceable                                                                                                                     |
| On-battery runtime                  | Four hours in standard operating mode, up to 5.5 hours in power saving mode                                                                                     |
| Charging time                       | < 6 hours                                                                                                                                                       |
| Data acquisition                    |                                                                                                                                                                 |
| Resolution                          | 16-bit synchronous sampling                                                                                                                                     |
| Sampling frequency                  | 10.24 kHz at 50/60 Hz, synchronized to mains frequency                                                                                                          |
| Input signal frequency              | 50/60 Hz (42.5 to 69 Hz)                                                                                                                                        |
| Circuit types                       | 1-φ, 1-φ IT, split phase, 3-φ delta, 3-φ wye, 3-φ wye IT, 3-φ wye balanced, 3-φ Aron/Blonde (2-element delta), 3-φ delta open leg, currents only (load studies) |
| Data storage                        | Internal flash memory (not user replaceable)                                                                                                                    |
| Memory size                         | Typical 10 logging sessions of 8 weeks with 1-minute intervals and 500 events <sup>1</sup>                                                                      |
| Basic interval                      |                                                                                                                                                                 |
| Measured parameters                 | Voltage, current, aux, frequency, THD V, THD A, power, power factor, fundamental power, DPF, energy                                                             |
| Averaging interval                  | User selectable: 1 sec, 5 sec, 10 sec, 30 sec, 1 min, 5 min, 10 min, 15 min, 30 min                                                                             |
| Averaging time min/max values       | Voltage, Current: Full cycle RMS updated every half cycle (URMS1/2 according to IEC61000-4-30)<br>Aux, Power: 200ms                                             |
| Demand Interval (Energy Meter Mode) |                                                                                                                                                                 |
| Measured parameters                 | Energy (Wh, varh, VAh), PF, maximum demand, cost of energy                                                                                                      |
| Interval                            | User selectable: 5 min, 10 min, 15 min, 20 min, 30 min, off                                                                                                     |
| Power quality measurements          |                                                                                                                                                                 |
| Measured parameter                  | Voltage, frequency, unbalance, voltage harmonics, THD V, current, harmonics, THD A, TDD                                                                         |
| Averaging interval                  | 10 min                                                                                                                                                          |
| Individual harmonics                | 2nd ...50th harmonic                                                                                                                                            |
| Total harmonic distortion           | Calculated on 50 harmonics                                                                                                                                      |
| Events                              | Voltage: dips, swells, interruptions, current: inrush current                                                                                                   |
| Triggered recordings                | Full cycle RMS updated every half cycle of voltage and current (Urms1/2 according to IEC61000-4-30)<br>Waveform of voltage and current                          |

<sup>1</sup>The number of possible logging sessions and logging period depends on user requirements.

**Electrical specifications** *cont.*
**Standards Compliance**

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| Harmonics                | IEC 61000-4-7: Class 1<br>IEEE 519 (short time harmonics) |
| Power quality            | IEC 61000-4-30 Class S, IEC62586-1 (PQI-S device)         |
| Power                    | IEEE 1459                                                 |
| Power quality compliance | EN50160 (for measured parameters)                         |

**Interfaces**

|           |                                                                                                                 |
|-----------|-----------------------------------------------------------------------------------------------------------------|
| USB-A     | File transfer via USB flash drive, firmware updates, max. supply current: 120 mA                                |
| WiFi      | File transfer and remote control via direct connection or WiFi infrastructure                                   |
| Bluetooth | Read auxiliary measurement data from Fluke Connect® 3000 series modules (requires 1738, or 1736 upgrade option) |
| USB-mini  | Data download device to PC                                                                                      |

**Voltage inputs**

|                       |                             |
|-----------------------|-----------------------------|
| Number of inputs      | 4 (3 phases and neutral)    |
| Maximum input voltage | 1000 Vrms, CF 1.7           |
| Input impedance       | 10 MΩ                       |
| Bandwidth             | 42.5 Hz - 3.5 kHz           |
| Scaling               | 1:1 and variable            |
| Measurement category  | 1000 V CAT III/600 V CAT IV |

**Current inputs**

|                     |                                                                                            |
|---------------------|--------------------------------------------------------------------------------------------|
| Number of inputs    | 4, mode selected automatically for attached sensor                                         |
| Input voltage       | Clamp input: 500 mVrms/50 mVrms; CF 2.8                                                    |
| Rogowski coil input | 150 mVrms/15 mVrms at 50 Hz, 180 mVrms/18 mVrms at 60 Hz; CF 4; all at nominal probe range |
| Range               | 1 A to 150 A/10 A to 1500 A with thin flexible current probe i17XX-flex1500 12"            |
|                     | 3 A to 300 A/30 A to 3000 A with thin flexible current probe i17XX-flex3000 24"            |
|                     | 6 A to 600 A/60 A to 6000 A with thin flexible current probe i17XX-flex6000 36"            |
|                     | 40 mA to 4 A/0.4 A to 40 A with 40 A clamp i40s-EL                                         |
| Bandwidth           | 42.5 Hz - 3.5 kHz                                                                          |
| Scaling             | 1:1 and variable                                                                           |

**Auxiliary inputs**

|                  |                                                                |
|------------------|----------------------------------------------------------------|
| Number of inputs | 2                                                              |
| Input range      | 0 to ± 10 V dc, 1 reading/s                                    |
| Scale factor     | Format: mx + b (gain and offset) user configurable             |
| Displayed units  | User configurable (7 characters, for example, °C, psi, or m/s) |

**Wireless connection**

|                   |                            |
|-------------------|----------------------------|
| Number of inputs  | 2                          |
| Supported modules | Fluke Connect® 3000 series |
| Acquisition       | 1 reading/s                |

| <b>Environmental specifications</b> |                                                                                                                                                                                                                                        |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating temperature               | -10 °C to +50 °C (14 °F to 122 °F)                                                                                                                                                                                                     |
| Storage temperature                 | -20 °C to +60 °C (-4 °F to 140 °F), with battery: -20 °C to +50 °C (-4 °F to 122 °F)                                                                                                                                                   |
| Operating humidity                  | 10 °C to 30 °C (50 °F to 86 °F) max. 95 % RH<br>30 °C to 40 °C (86 °F to 104 °F) max. 75 % RH<br>40 °C to 50 °C (104 °F to 122 °F) max. 45 % RH                                                                                        |
| Operating altitude                  | 2000 m (up to 4000 m derate to 1000 V CAT II/600 V CAT III/300 V CAT IV)                                                                                                                                                               |
| Storage altitude                    | 12,000 m                                                                                                                                                                                                                               |
| Enclosure                           | IP50 in accordance with EN60529                                                                                                                                                                                                        |
| Vibration                           | MIL-T-28800E, Type 3, Class III, Style B                                                                                                                                                                                               |
| Safety                              | IEC 61010-1<br>IEC Mains Input: Overvoltage Category II, Pollution Degree 2<br>Voltage Terminals: Overvoltage Category IV, Pollution Degree 2                                                                                          |
|                                     | IEC 61010-2-031: CAT IV 600 V / CAT III 1000 V                                                                                                                                                                                         |
| Electromagnetic compatibility (EMC) | EN 61326-1: Industrial CISPR 11: Group 1, Class A                                                                                                                                                                                      |
|                                     | Korea (KCC): Class A Equipment (industrial broadcasting and communication equipment)                                                                                                                                                   |
|                                     | USA (FCC): 47 CFR 15 subpart B. This product is considered an exempt device per clause 15.103                                                                                                                                          |
| Temperature coefficient             | 0.1 x accuracy specification/°C                                                                                                                                                                                                        |
| <b>General specifications</b>       |                                                                                                                                                                                                                                        |
| Color LCD display                   | 4.3-inch active matrix TFT, 480 pixels x 272 pixels, resistive touch panel                                                                                                                                                             |
| Warranty                            | Instrument and power supply: Two-years (battery not included)<br>Accessories: one-year<br>Calibration cycle: two-years                                                                                                                 |
| Dimensions                          | Instrument: 19.8 cm x 16.7 cm x 5.5 cm (7.8 in x 6.6 in x 2.2 in)<br>Power supply: 13.0 cm x 13.0 cm x 4.5 cm (5.1 in x 5.1 in x 1.8 in)<br>Instrument with power supply attached: 19.8 cm x 16.7 cm x 9 cm (7.8 in x 6.6 in x 3.5 in) |
| Weight                              | Instrument: 1.1 kg (2.5 lb)<br>Power supply: 400 g (0.9 lb)                                                                                                                                                                            |
| Tamper protection                   | Kensington lock slot                                                                                                                                                                                                                   |

**i17xx-flex 1500 12" Flexible Current Probe specifications**

|                                                          |                                                                                                        |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Measuring range                                          | 1 to 150 A ac/10 to 1500 A ac                                                                          |
| Nondestructive current                                   | 100 kA (50/60 Hz)                                                                                      |
| Intrinsic error at reference condition*                  | ± 0.7 % of reading                                                                                     |
| Accuracy 173x + iFlex                                    | ± (1 % of reading + 0.02 % of range)                                                                   |
| Temperature coefficient over operating temperature range | 0.05 % of reading/°C 0.09 % of reading/°F                                                              |
| Working voltage                                          | 1000 V CAT III, 600 V CAT IV                                                                           |
| Probe cable length                                       | 305 mm (12 in)                                                                                         |
| Probe cable diameter                                     | 7.5 mm (0.3 in)                                                                                        |
| Minimum bending radius                                   | 38 mm (1.5 in)                                                                                         |
| Output cable length                                      | 2 m (6.6 ft)                                                                                           |
| Weight                                                   | 115 g                                                                                                  |
| Probe cable material                                     | TPR                                                                                                    |
| Coupling material                                        | POM + ABS/PC                                                                                           |
| Output cable                                             | TPR/PVC                                                                                                |
| Operating temperature                                    | -20 °C to +70 °C (-4 °F to 158 °F) temperature of conductor under test shall not exceed 80 °C (176 °F) |
| Temperature, non-operating                               | -40 °C to +80 °C (-40 °F to 176 °F)                                                                    |
| Relative humidity, operating                             | 15 % to 85 % non-condensing                                                                            |
| IP rating                                                | IEC 60529:IP50                                                                                         |
| Warranty                                                 | One-year                                                                                               |

\* Reference condition:

- Environmental: 23 °C ± 5 °C, no external electrical/magnetic field, RH 65 %
- Primary conductor in center position

## Model features

|                                                               | 1736 Power Logger          |                          |                              | 1738 Power Logger             |                                          |                                               |
|---------------------------------------------------------------|----------------------------|--------------------------|------------------------------|-------------------------------|------------------------------------------|-----------------------------------------------|
|                                                               | FLUKE-1736/B               | FLUKE-1736/EUS           | FLUKE-1736/INTL              | FLUKE-1738/B                  | FLUKE-1738/EUS                           | FLUKE-1738/INTL                               |
| Model                                                         | Power logger basic version | Power logger (EU and US) | Power logger (International) | Power logger advanced version | Power logger advance version (EU and US) | Power logger advanced version (International) |
| <b>Functions</b>                                              |                            |                          |                              |                               |                                          |                                               |
| PQ Health (EN50160 analysis)                                  | Opt.                       | Opt.                     | Opt.                         | •                             | •                                        | •                                             |
| IEEE 519 reporting                                            | Opt.                       | Opt.                     | Opt.                         | Opt.                          | Opt.                                     | Opt.                                          |
| Fluke Connect® module support (up to 2 modules**)             | Opt.                       | Opt.                     | Opt.                         | •                             | •                                        | •                                             |
| <b>Recording</b>                                              |                            |                          |                              |                               |                                          |                                               |
| Trend                                                         | •                          | •                        | •                            | •                             | •                                        | •                                             |
| Waveform Snapshots + RMS profile                              | Opt.                       | Opt.                     | Opt.                         | •                             | •                                        | •                                             |
| <b>Communication</b>                                          |                            |                          |                              |                               |                                          |                                               |
| USB (mini B)                                                  | •                          | •                        | •                            | •                             | •                                        | •                                             |
| WiFi download of instrument data                              | •                          | •                        | Opt.                         | •                             | •                                        | Opt.                                          |
| WiFi download via WiFi access point (requires registration)** | Opt.                       | Opt.                     | Opt.                         | Opt.                          | Opt.                                     | Opt.                                          |
| <b>Included Accessories</b>                                   |                            |                          |                              |                               |                                          |                                               |
| WiFi only adapter**                                           | –                          | •                        | –                            | –                             | –                                        | –                                             |
| WiFi and BLE adapter**                                        | Opt.                       | Opt.                     | Opt.                         | Opt.                          | •                                        | Opt.                                          |
| USB flash drive (4GB)                                         | •                          | •                        | •                            | •                             | •                                        | •                                             |
| USB Cable                                                     | •                          | •                        | •                            | •                             | •                                        | •                                             |
| 3PHVL-173 Flat Cable                                          | •                          | •                        | •                            | •                             | •                                        | •                                             |
| 1x red, 1x black 0.1m cable                                   | •                          | •                        | •                            | •                             | •                                        | •                                             |
| 1x red, 1x black 1.5m lead                                    | •                          | •                        | •                            | •                             | •                                        | •                                             |
| Alligator clips                                               | 4                          | 4                        | 4                            | 4                             | 4                                        | 4                                             |
| C173x Soft Case                                               | •                          | •                        | •                            | •                             | •                                        | •                                             |
| Color Coding set                                              | •                          | •                        | •                            | •                             | •                                        | •                                             |
| 173x-Hanger kit                                               | Opt.                       | Opt.                     | Opt.                         | •                             | •                                        | •                                             |
| MP1-Magnet Probe                                              | Opt.                       | Opt.                     | Opt.                         | 4                             | 4                                        | 4                                             |
| i173X-flex1500 12"                                            | Opt.                       | 4                        | 4                            | Opt.                          | 4                                        | 4                                             |
| Line cord                                                     | EU, UK, US, AU, BR         | EU, US, UK               | EU, UK, US, AU, BR           | EU, UK, US, AU, BR            | EU, US, UK                               | EU, UK, US, AU, BR                            |
| <b>Compatible Optional Accessories</b>                        |                            |                          |                              |                               |                                          |                                               |
| 173X- AUX analog adapter                                      | •                          | •                        | •                            | •                             | •                                        | •                                             |
| i17XX-flex1500 12" Current Probe                              | •                          | •                        | •                            | •                             | •                                        | •                                             |
| i17XX-flex3000 24" Current Probe                              | •                          | •                        | •                            | •                             | •                                        | •                                             |
| i17XX-flex6000 36" Current Probe                              | •                          | •                        | •                            | •                             | •                                        | •                                             |
| i40s-EL Current Clamp                                         | •                          | •                        | •                            | •                             | •                                        | •                                             |
| IEEE 519 reporting opt                                        | •                          | •                        | •                            | •                             | •                                        | •                                             |
| 1736 to 1738 upgrade (1736/UPGRADE)                           | •                          | •                        | •                            | –                             | –                                        | –                                             |

\* Modules not included

\*\* Not all models are available in all countries. Check with your local Fluke representative.

## Ordering information\*\*

**FLUKE-1736/B** Power Logger, Basic version (excludes current probes)

**FLUKE-1736/EUS** Power Logger, EU and US version (includes current probes)

**FLUKE-1736/INTL** Power Logger, International version (includes current probes)

**FLUKE-1736/WINTL** Power Logger, International wireless version (includes current probes)

**FLUKE-1738/B** Power Logger, Advanced version (excludes current probes)

**FLUKE-1738/EUS** Power Logger, EU/US Advanced version (includes current probes)

**FLUKE-1738/INTL** Power Logger, International advanced version (includes current probes)

**FLUKE-1738/WINTL** Power Logger, International wireless version (includes current probes)

### Fluke-1736 includes:

Instrument, power supply, voltage test leads, alligator clips (4x), 12 in 1,500A flexible current probe (4x), soft case, Energy Analyze Plus software, WiFi adapter\*\*, line cords, color coding set and documentation on USB flash drive

### Fluke 1738 includes:

Instrument, power supply, voltage test leads, alligator clips (4x), 12 in 1,500A flexible current probe (4x), soft case, Energy Analyze Plus software, magnetic hanging strap, magnetic voltage probes (4x), WiFi/BLE adapter\*\*, line cords, color coding set and documentation on USB flash drive

\*\*Not all models are available in all countries. Check with your local Fluke representative.



## See it. Save it. Share it. All the facts, right in the field.

Fluke Connect® with ShareLive™ video call is the largest system of software and wireless test tools that lets you stay in contact with your entire team without leaving the field\*. The Fluke Connect software is compatible with the following devices: iPhone models 4S and up running iOS 8.0 or higher, iPad Air and iPad Mini (2nd generation) in an iPhone frame on iPad and iPod Touch (5th generation), HTC One and One M8 running Android 4.4.x or higher, LG G3 and Nexus 5 running Android 4.4.x or higher, Samsung Galaxy S4 running Android 4.3.x or higher, Samsung Galaxy S5 running Android 4.4.x or higher and works with over 30 different Fluke products—the largest system of connected test tools in the world. And more are on the way. Go to the Fluke website to find out more

\*Within provider's wireless service area.

### Download the app at:



Smartphone wireless service and data plan not included with purchase.



All trademarks are the property of their respective owners. Smart phone, wireless service and data plan not included with purchase. First 5 GB of storage is free. Compatible with iPhone 4x and up running iOS 7 or higher, iPad (in an iPhone frame on iPad) and Galaxy S4, Nexus 5, HTC One running Android™ 4.4.x or higher. Apple and the Apple logo are trademarks of Apple Inc. registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a trademark of Google Inc.

Fluke Connect is not available in all countries.