

SPECIFICATIONS

MEASURED PARAMETERS

(4) Differential Voltage: 16 bit resolution

0-1000Vrms, AC/DC, $\pm 0.1\%$ reading, $<40V \pm 0.5\%FS$

IEC 61000-4-30 Class A: 60-1000Vrms, $\pm 0.1\%$ of U_{din}, range of 10% ~ 150% of U_{din}

Transients: 0-1500Vpk, $\pm 0.2\%$ of U_{din}

(4) Current (rms): 512 s/c, 16 bit resolution

Range probe dep., AC/DC, $\pm 0.1\%$ reading $\pm 0.05\%FS$, $\pm 0.2\%$ of U_{din}

Transientss: Range probe dep., $\pm 0.2\%$ of U_{din}

Frequency:

16-25Hz, 42.5-69Hz, $\pm 0.01Hz$

CALCULATED PARAMETERS

Power/Energy - 1 Second sampling

Real Power (W) - P: meets 0.2S requirements, range probe dep.

Apparent Power (VA) - S: meets 0.2S requirements, range probe dep.

Reactive Power (var) - Q: meets 0.2S requirements, range probe dep.

Power Factor (W/VA) - "true" 1 to 0 to 1

Displacement PF 1 to 0 to 1

Demand (in W): meets 0.2S requirements, range probe dep.

Energy (in Wh): meets 0.2S requirements, range probe dep.

Distortion - 200ms, 3 sec, 10 min windows

V_{thd}: 0-100%, $\pm 5\%$ for $V \geq 1\% V_{nom}$,

V Ind Harm: DC, 2-127, $\pm 5\%$ for $V \geq 1\% V_{nom}$

I_{thd}: 0-100%, $\pm 5\%$ for $I \geq 1\% V_{nom}$,

I Ind Harm: DC, 2-63, $\pm 5\%$ for $I \geq 1\% V_{nom}$

Misc.

Pst - 10 minutes: 0.2-10, ± 0.05 @ Pst=1

Plt - 2 hours: 0.2-10, ± 0.05 @ Pst=1

EASE OF USE FEATURES

Automatic Setups

Pre-programmed monitoring modes

AnswerModules®- Sag/Dip Directivity, PF Cap, Motor

Dashboards - PQ, Demand & Energy

Simultaneous PQ, Demand & Energy

Mini Report

STANDARDS COMPLIANCE

Power Quality

IEC 61000-4-30 Class A: Edition 2 (2008)

IEEE 1159: 2009

Power

IEEE 1459: 2000

Harmonics

IEC 61000-4-7 Class 1: Edition 2 (2008)

IEEE 519: 2014

Voltage Flicker

IEC 61000-4-15: Edition 2 (2010)

IEEE 1453: 2011

Compliance/Testing

EN 50160: 2010

GENERAL SPECIFICATIONS

Size (10"w x 8"h x 2.75"d) (25.4cm x 20.3cm x 7.00 cm)

Weight: 1.9 kg, 4.2lbs

Operating temperature: 0 to 50 deg C

Storage temperature: -20 to 60 deg C

Humidity: 10-90% non condensing

Clock accuracy and resolution

Internal: ± 1 sec/day at 25deg C

NTP: ± 10 msec

GPS: ± 1 msec

AC Adapter: 90-264Vac 50/60Hz

Battery capacity and charge time: 3 hours run time on full charge

Memory size: 4GB

Display: 7" WVGA color graphic, Icon based touch LCD, LED Backlit

Languages: English, German, Spanish, French, Italian, Swedish, Finnish, Polish, Chinese (traditional and simplified), Thai, Korean

COMMUNICATIONS


Ethernet, 802.11 b/g/n Wireless

USB On the Go

Bluetooth via USB adapter

VNC remote control

Android® & Apple® App

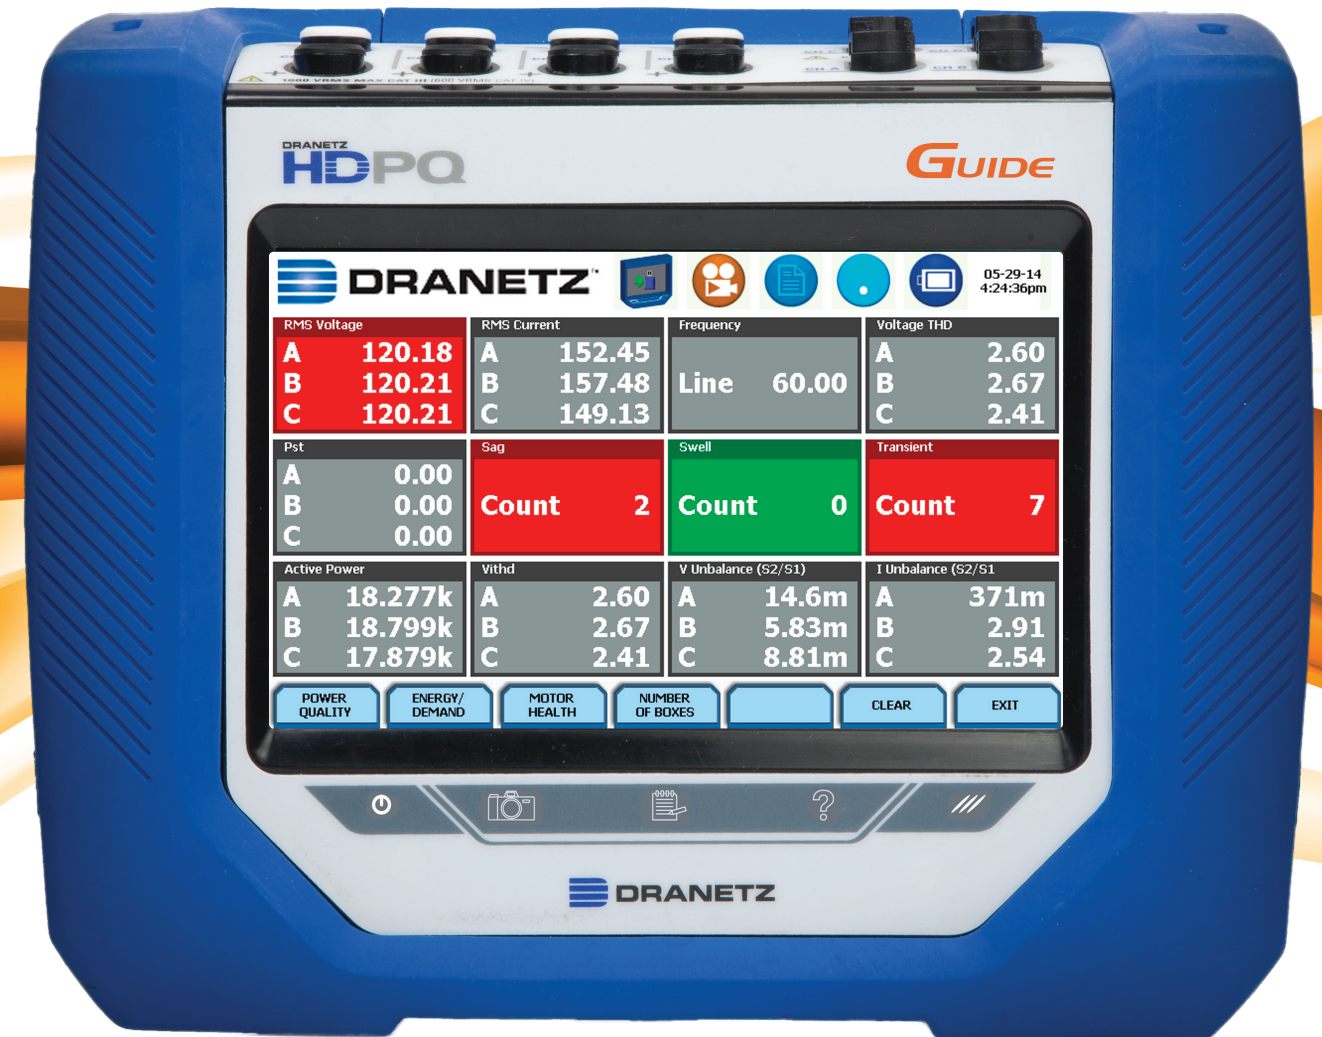

**The Best Combination of Value & Technology
in a PQ Analyzer – Safe, Powerful & Intelligent!**

Applications

The Dranetz HDPQ Guide was designed from the ground up to be your all-in-one power monitoring tool. Whether your application requires power quality monitoring, demand/energy monitoring, or both, HDPQ Guide's powerful feature set provides you the tools needed to get the job done. HDPQ Guide is perfect for applications such as PQ surveys, fault recording, inrush, motor testing, harmonic analysis, advanced distortion analysis, demand/energy/load studies, and much more.

Advanced PQ & Energy Capabilities!

Dranetz products have a long-standing tradition of having state of the art PQ monitoring capabilities, and the Dranetz HDPQ Guide is no exception. HDPQ Guide meets and exceeds current versions of the most stringent industry monitoring standards, including:

Power Quality - IEC 61000-4-30 Class A, IEEE 1159

Harmonics - IEC 61000-4-7, IEEE 519

Voltage Flicker - IEC 61000-4-15, IEEE 1453 – Including Pinst

Advanced Energy – IEEE 1459

Transient Capture

The Dranetz HDPQ Guide goes well beyond the requirements of the PQ standards by including transient capture capabilities for voltage and current, such as: transients to 32 microseconds, peak sample transients, and advanced waveshape change transients that can identify changes from cycle to cycle.

AnswerModules® – Smart & Good Looking!

Only available from Dranetz, AnswerModules are algorithms that automatically identify power quality problems and their source. These diagnostic and reporting tools are based on our decades of analytical experience, benchmarking, and troubleshooting work. The HDPQ Guide has three built in AnswerModules:

Sag/Dip Directivity: Automatically identifies the source of a Sag/Dip as being upstream or downstream from the monitoring source.

Capacitor Switching: Automatically identifies transients as being Power Factor correction transients.

Motor Analysis: Enables the PQ parameters that are important to motor surveys, and provides a custom dashboard for results.



*Power Quality instruments are no different than anything else – you get what you pay for – you just get much more from the **Dranetz HDPQ® Guide** than with any other instrument in its class!*

V & I Connections

- 1000V CAT III (600V CAT IV)
- AC/DC Differential Voltage & Current Inputs
- DRANFLEX CT's powered by the instrument




Innovative Package & Wide Screen

7" color, wide screen touch display. 40% larger than before - the largest in the industry!




Dran-View 7

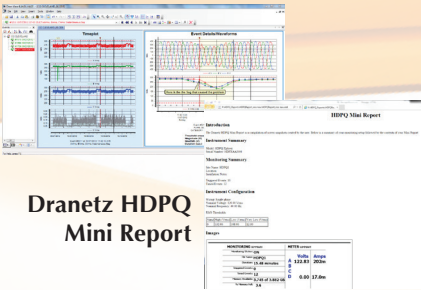


Dranetz HDPQ Mini Report

Easy to Use Intuitive User Interface

With their innovative packaging and 7" wide screen color touch display, the Dranetz HDPQ family of instruments are the most powerful and easiest to use power monitoring instruments available. Like your tablet computer, simply use your finger or stylus to easily navigate the intuitive, icon-based user interface. Setting up the HDPQ Guide is made easy with automatic setups that detect the circuit type, voltage, etc. and configure the instrument in seconds with typical industry settings. For customized setups, use the manual Wizard mode that guides you step-by-step through each setup. During monitoring, real time measurements can be viewed in many ways, including a color-coded reporting Dashboard, and meter/scope/phasor/harmonics displays. Recorded data can be viewed over time by using the timeline and event list displays, and also by using compliance reports, such as EN 50160.



Dashboard Display



Demand & Energy Trend

Reporting & Analysis

The **Dranetz HDPQ Mini Report** tool allows you to easily take a snapshot of any screen for future use. By simply pressing the camera button, screen snapshots are saved, which compiles information in an HTML report. Once completed, mini reports can be uploaded to a computer for editing, annotating, emailing, etc.

Dran-View® 7 is our industry leading Windows-based software program that enables power professionals to simply and quickly visualize and analyze power monitoring data. Dran-View enhances the Dranetz HDPQ Guide with its advanced analytical capabilities. It is successfully used by thousands of customers around the world, and has become the industry leading power management software tool. Dran-View is easy to use, yet adds tremendous value and power to our Dranetz HDPQ family of instruments. Of course Dran-View can trend and list data recorded by the instrument, but it also includes a built-in report writer, allows you to embed pictures, provides mathematical analysis tools, and even includes a rescue kit to help correct connection mistakes.

Demand & Energy Surveys

Managing energy and reducing related expenses is always of paramount importance, and in many cases is a corporate mandate. In addition to industry-best power quality monitoring capabilities, all Dranetz HDPQ family products also have extensive demand and energy monitoring capabilities for both long and short duration surveys. Unlike other lesser capable instruments, there's more than enough horsepower to perform complete PQ and energy surveys simultaneously – it's your choice to survey for PQ, Energy, or both. Seeing results is easy when using the energy and demand Dashboard reports that display real time and accumulated readings in a color-coded reporting format. There's also a billing report that includes your energy rates, including time of use. You can also upload your data to our Dran-View 7 software for viewing, reporting, and printing via PC.

Safe Remote Accessibility via Apps and VNC

DON'T RISK YOUR SAFETY! The Dranetz HDPQ Guide comes with a standard Ethernet port, built-in Wireless, and USB Bluetooth communications that allow you to easily comply with today's arc flash and other safety standards. Simply install your HDPQ Guide, close the cabinet door, and use your Tablet, Smartphone, PC, or MAC computer to remotely control monitoring and review data. **Fully control your instrument remotely**, and see exactly what's on the local 7" display by using a free VNC program or App for PC, MAC, Apple and Android devices. Or, you can also use the **Dranetz HDPQ App** for Apple and Android devices to remotely view a real-time dashboard, scope mode, or remotely configure the instrument using automatic setups. For local access, there's also a built-in USB port to copy data to a USB drive or directly to your computer using a Plug-N-Play connection.



HDPQ SELECTION GUIDE


HDPQ Visa
HDPQ Guide
HDPQ Xplorer
HDPQ Xplorer 400

Features

Available with an IP65 Enclosure


HDPQ-SP Visa
HDPQ-SP Guide
HDPQ-SP XPLORER
HDPQ-SP XPLORER 400

Enclosure

Portable with 7" Touch Screen



Communications

Ethernet



Wi-Fi



Bluetooth

Optional



USB



VNC for Full Remote Control of the Instrument



Apple & Android Apps for Metering & Alarming



GPS Time Synch (See note below)



Measurements

(4) Differential, AC/DC Voltage Channels, 0-1000V



(4) Differential, AC/DC Current Channels, FLEX Power



1000V Cat III, 600V CAT IV



IEC 61000-4-30:2008 Class A with Certificate



512 Samples/Cycle/Channel on V & I



Sag/Dip, Swell



Transients to 32us/40us (60Hz/50Hz)



Transients to 1us



Demand & Energy



IEEE 1459 Advanced Energy



Harmonics V/I

127/63

127/63

127/63

127/63

EN 50160 Edition 3



400Hz monitoring



AnswerModules

Motor Health



Sag Directivity



Power Factor Correction Capacitor



Setups

Automatic Setups for PQ, Demand & Energy



Manual Setup Wizard



Monitoring Modes

7

9

9

9

Max Pre/Post Trigger Cycles

100

10,000

10,000

10000

Transient Triggers

3

3

4

4

Safety

cULus



CE

