




User's Manual
32 in. 4-Drawer Cart

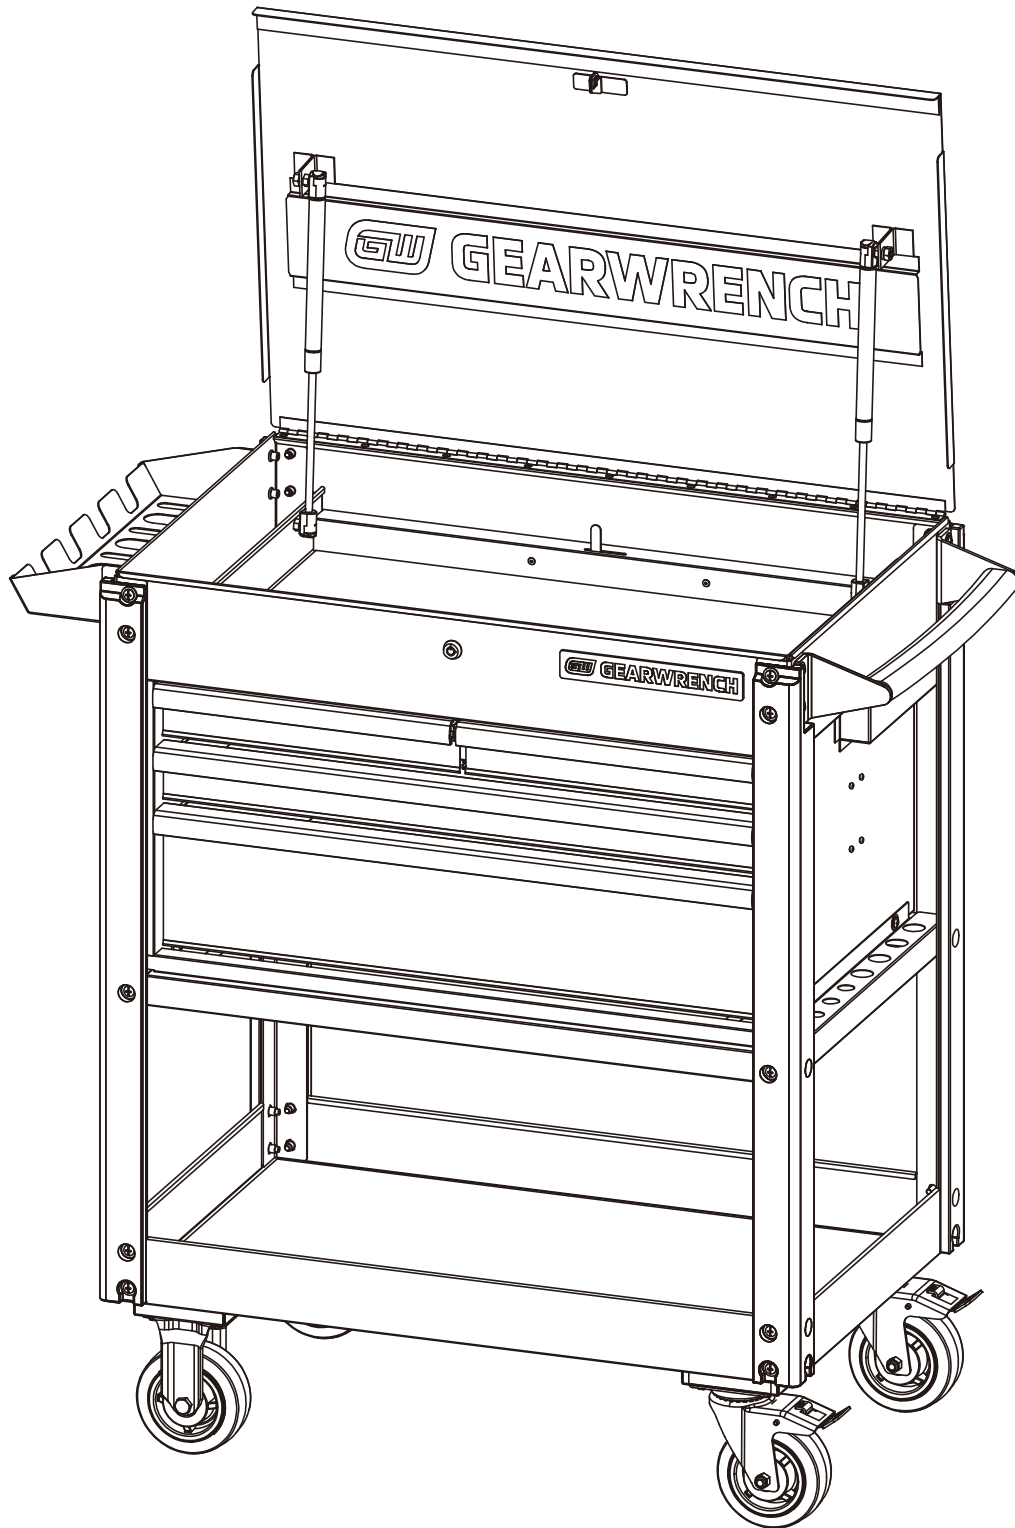

Safety Information

1. Do not pull this unit , push it when moving.
2. Use the brakes when this product is not being moved. This prevents the product from rolling.
3. Do not alter this product in any manner or it will void the warranty.
4. Before locking the unit, ensure the drawers are completely closed in order for the lock mechanism to work properly.
5. Do not attach or mount this product to a vehicle or mobile trailers. This may cause personal injury or product damage. Mounting this product to any vehicle or mobile trailers in any manner will void warranty.
6. Be careful when opening more than one drawer. The product may become unstable and tip, which may cause personal injury or product damage.
7. Keep the product on level surfaces. The product may become unstable and tip if stored or moved on an unlevel surface, which may cause personal injury or product damage.
8. Lock the drawers before moving this product. The drawers could come open and make the product unstable and tip, which may cause personal injury or product damage.

Specifications

Drawer load capacity	100 lbs
Total weight capacity	650 lbs

Tools Required




12mm Wrench



Phillips Screwdriver

Parts

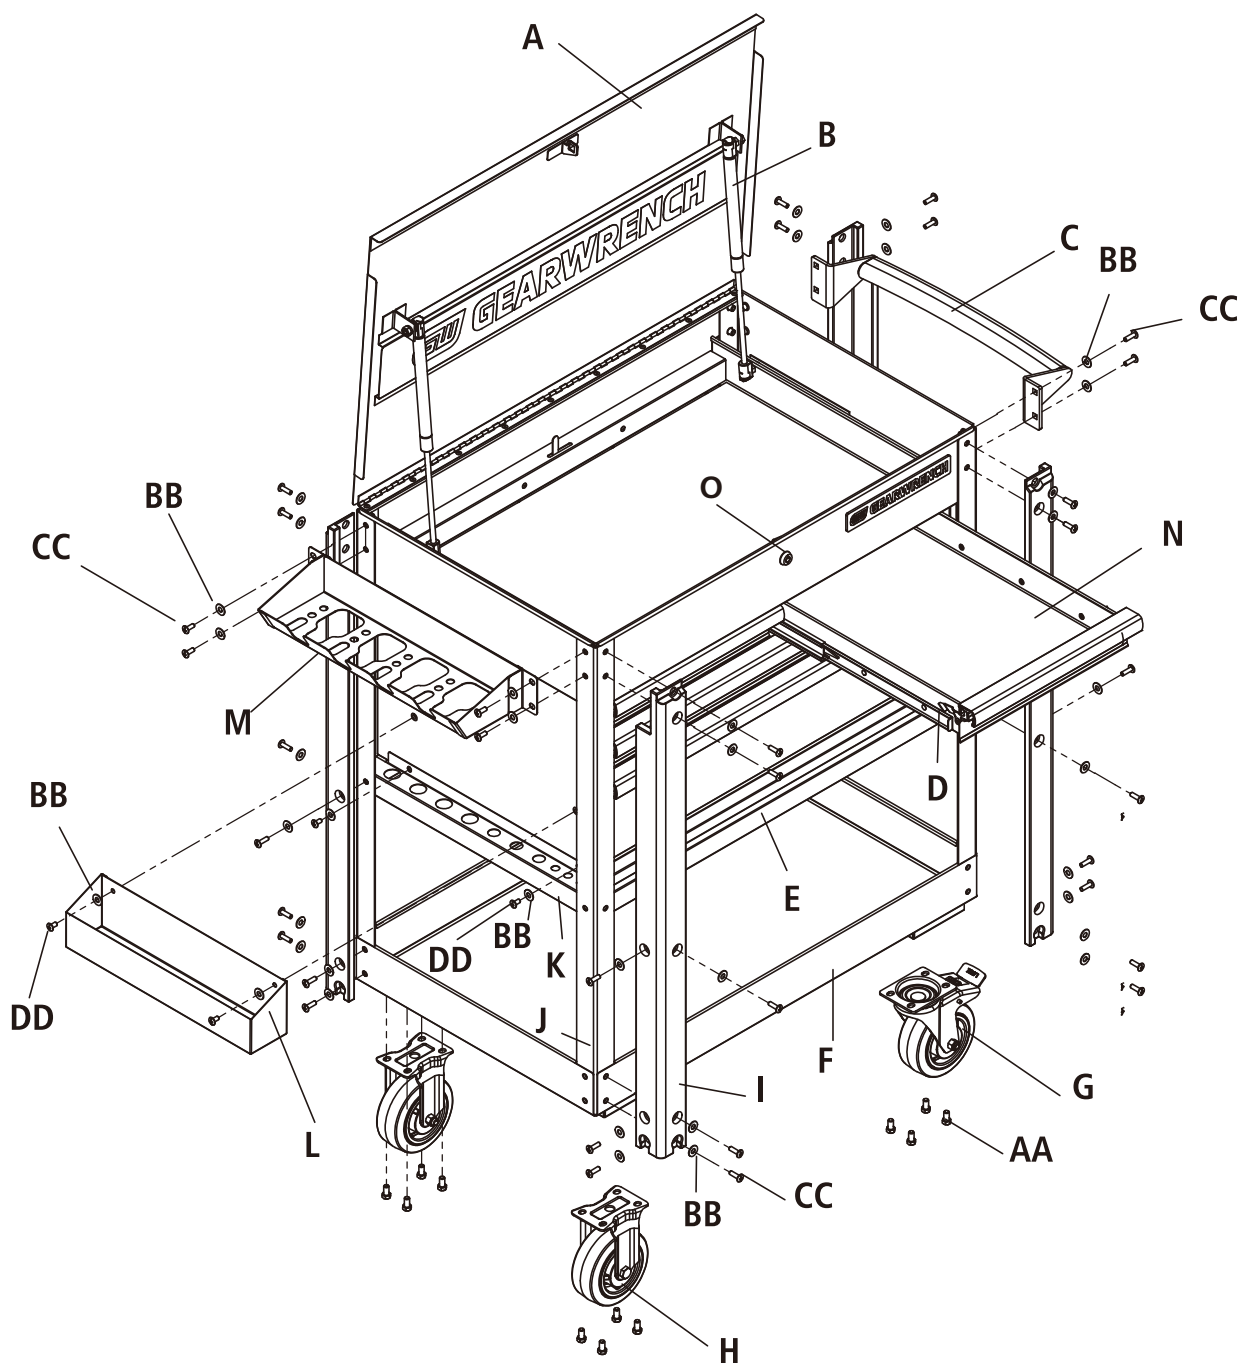


Part	Description	Quantity	Part	Description	Quantity
A	4-Drawer Chest	1	K	Short Support	2
B	Gas Strut	2	L	Storage Tray	1
C	Side Handle	1	M	Power Tool Holder	1
D	Drawer Slide	4 pair	N	Drawer Liners	6
E	Long Support	2	O	Barrel Lock and Keys	1
F	Bottom Tray	1	AA	Bolts M8x20mm	16
G	Swivel Caster	2	BB	Washers 18x8x1mm	46
H	Rigid Caster	2	CC	Bolts M6x20mm	40
I	Plastic Vertical Bumper	4	DD	Bolts M6x12mm	6
J	Post	4			

Assembly


Installing the Casters

- Lay the bottom tray (F) on its back.
- Mount the two swivel casters with brake (G) to the bottom tray using 4 bolts (AA) per caster.
- Mount the two rigid casters (H) to the opposite side of bottom tray using 4 bolts (AA) per caster.
- Tighten all bolts securely with a 13mm wrench.
- Return the bottom tray (F) to its upright position.

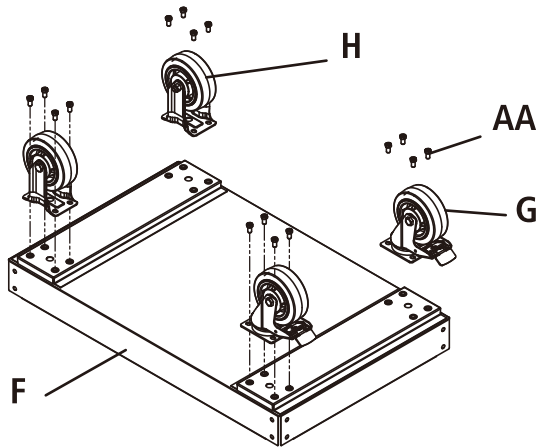


Installing the Posts and Plastic Vertical Bumpers

- Attach the four posts (J) inside corners of bottom tray (F) and the four plastic vertical bumpers (I) outside corners as shown using 4 washers (BB) and 4 bolts (CC) per corner.
- **Do not over tighten as this could damage the bumpers.**

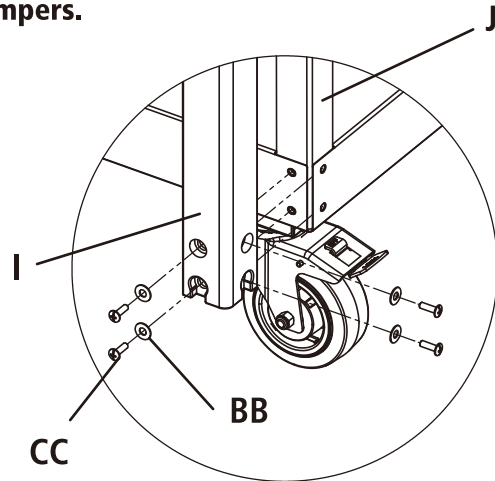

Installing the Long Supports and Short Supports


- Fit the two short supports (K left) and (K right) using 4 washers (BB) and 4 bolts (CC). Then fit the two long support (F) using 4 washers (BB) and 4 bolts (CC).

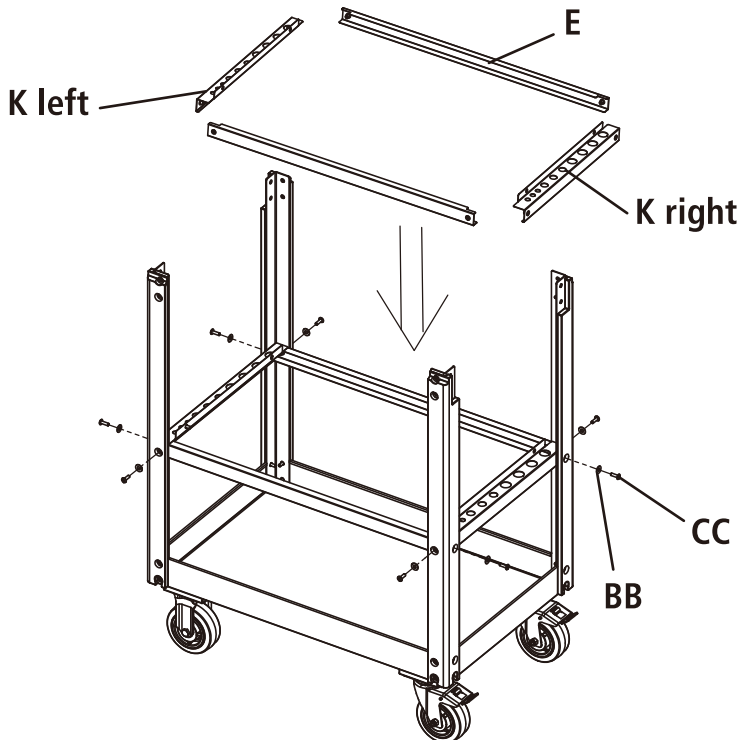

Installing the 4-Drawer Chest


Warning: This step requires at least 2 people to safely lift chest.

- Carefully lower the chest (A) onto the supports (E) and (K). Ensure the lip of the chest overhangs the 4 posts (J).
- Insert 4 washers (BB) and 4 bolts (DD) on two side short supports (K), 8 washers (BB) and 8 bolts (CC) on top front and back.

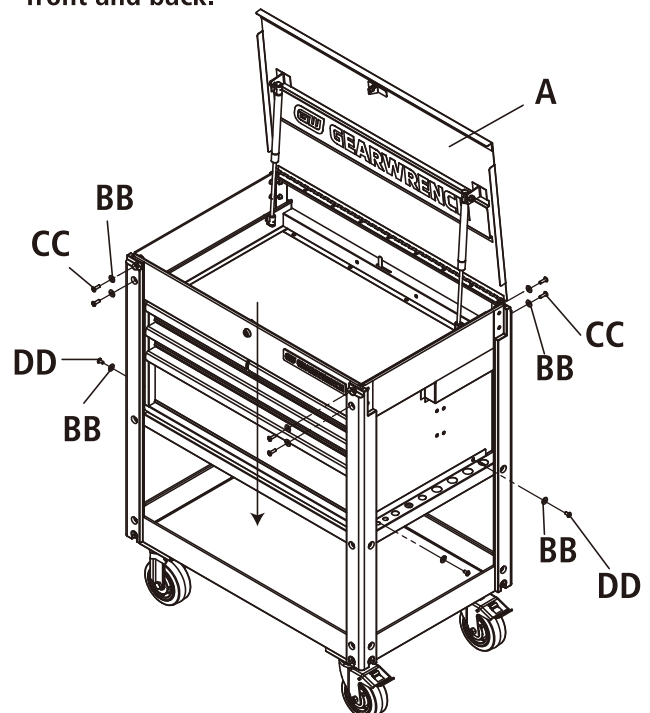


Installing the Side Handle

- Attach the side handle (C) to the right side using 4 washers (BB) and 4 bolts (CC). The side handle (C) should be installed on the same side of swivel casters (G).

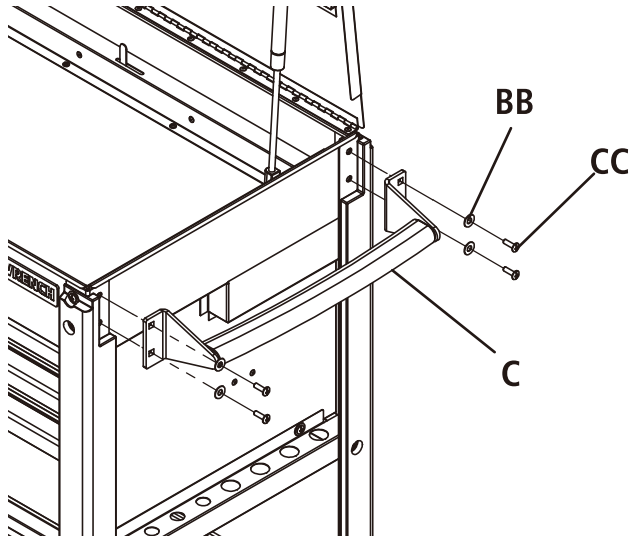


Installing the Power Tool Holder

- Attach the power tool holder (M) to the top left side using 4 washers (BB) and 4 bolts (CC).

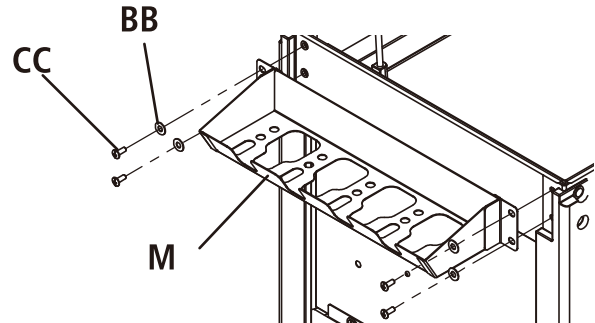

Installing the Hanging Bin


- Attach the hanging bin to the left side using 2 washers (BB) and 2 bolts (DD).

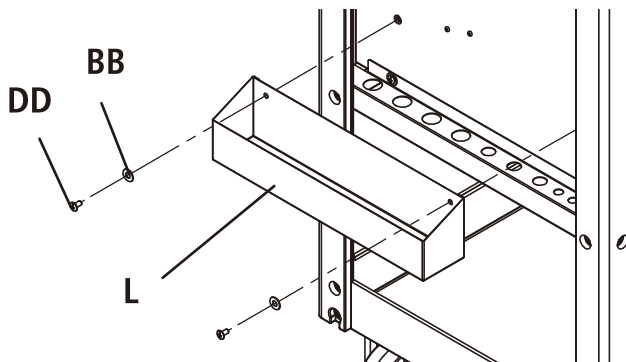

Operation


Removing the drawers

- Fully extend the empty drawer.
- Push up the one release lever while pulling down on the other release lever.
- Pull the drawer outward until it is released from the drawer slide.

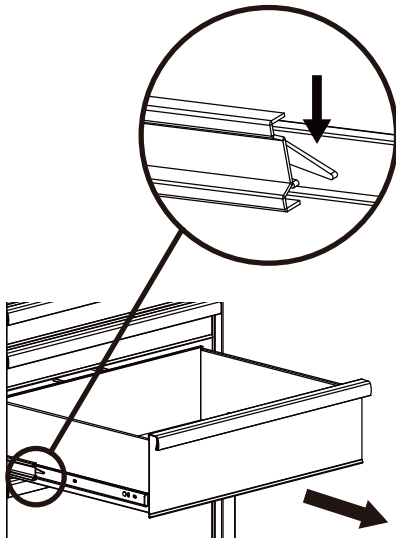

Re-inserting the drawers


- Extend the drawer slides.
- Insert the brackets on each side of the drawer into the slots in the slides, being careful that they are properly positioned.
- Once properly inserted, completely close the drawer to set the slides in their proper positions.

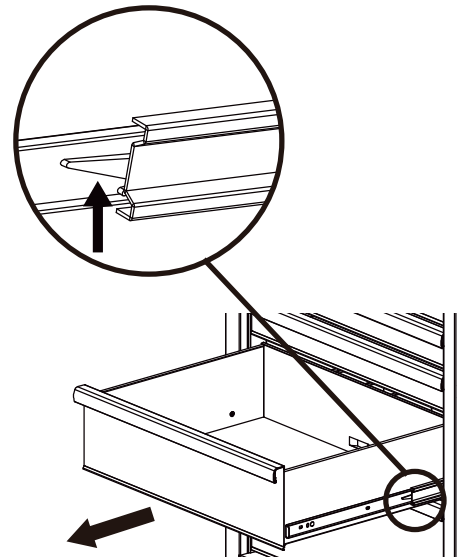

Maintenance


Caster maintenance

- Grease the casters annually using high-quality bearing grease.

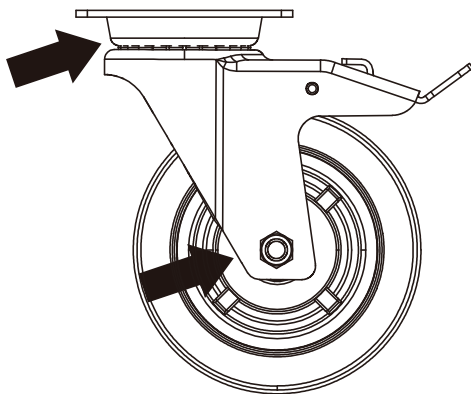

Drawer maintenance

- Lubricate the slides semi-annually with high-quality bearing grease.

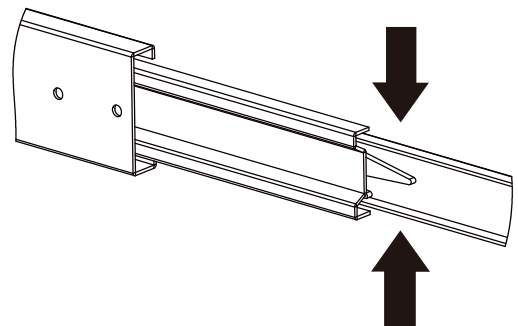

- Periodically clean the drawer fronts, drawer trim, and other surfaces with a mild detergent and water.
- Remove grease and oil with a mild cleaning detergent.

Warranty

GearWrench® tool storage cabinets are warranted for 5 years from the date of purchase to be free of defects in material and workmanship.

Apex warrants to each original Customer of Products sold by Apex that such Products are, at the time of delivery to the Customer, free of material and workmanship defects, provided that no warranty is made with respect to:

- (a) any Product which has been modified, disassembled and/or reassembled or altered in any way or improperly installed;
- (b) any Product which has, in Apex's judgment, been subject to negligence, misuse, abuse, accident, improper storage or damage during shipment;
- (c) any Product which has not been operated and maintained in accordance with normal practice and in conformity with recommendations and published specifications of Apex; and
- (d) any Products which have been serviced or repaired by anyone other than an Authorized Repair Center of Apex or modified by anyone other than Apex. Normal wear and tear is also excluded.

These warranties set forth herein are the sole warranties applicable to Products and is in lieu of all other warranties, whether express, implied or statutory. The implied warranties of merchantability and fitness for a particular purpose are specifically excluded.

Remedies: Customer's sole and exclusive remedy for breach of this Warranty is, at the option of Apex, repair or replacement of the defective product.

The Apex Tool Group is not responsible for personal injury or damage resulting from improper tool usage, product modification, abuse or usage beyond expected product life.

GearWrench Customer Service (USA)
Apex Tool Group

GEARWRENCH® is a registered trademark of Apex Brands, Inc., a Division of Apex Tool Group, LLC